



DROP FORGED HEAVY DUTY EYE NUTS

Stock Eye Nuts listed below, other than Blanks, are drilled and tapped standard regardless of finish. Both types drilled only, with special tapping or finish supplied to specification. Loads are based on a safety factor of 5 to 1. Self-colored finish is standard.

NOTE: Loads shown apply to Eye Nuts only, based on a vertical pull, and not to any connecting bolt or stud.

SELF-COLORED - BLANK OR DRILLED AND TAPPED




| Stock No. | Bail Size | Blank | Drilled & Tapped | |
|-----------|-----------|----------|------------------|----------|
| | | Part No. | Tap Size | Part No. |
| 100 | 5/16" | 17005 5 | 3/8"-16 | 17255 4 |
| 101 | 7/16" | 17010 9 | 1/2"-13 | 17260 8 |
| 102 | 9/16" | 17015 4 | 5/8"-11 | 17265 3 |
| 103 | 3/4" | 17020 8 | 3/4"-10 | 17270 7 |
| 104 | 7/8" | 17025 3 | 7/8"-9 | 17275 2 |
| 105 | 1" | 17030 7 | 1"-8 | 17280 6 |
| 105A | 1" | 17035 2 | 1-1/8"-7 | 17285 1 |
| 106 | 1-1/4" | 17040 6 | 1-1/4"-7 | 17290 5 |
| 107 | 1-3/8" | 17045 1 | 1-1/2"-6 | 17295 0 |



Blank



Drilled & Tapped

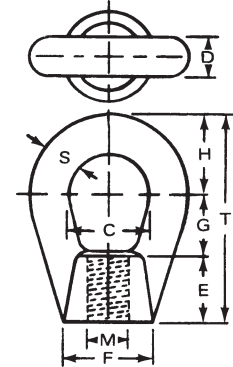

SPECIFICATIONS

| Stock No. | Dimensions - Inches | | | | | | | | | Working Load Limit (Tons) | Drilled & Tapped Wgt. Per 100 | Blank Wgt. Per 100 |
|-----------|---------------------|--------|--------|----------|--------|--------|--------|----------|----------|---------------------------|-------------------------------|--------------------|
| | C | S | D | M | F | E | G | H | T | | | |
| 100 | 7/8" | 5/16" | 5/16" | 3/8-16" | 3/4" | 3/4" | 3/4" | 3/4" | 2-1/4" | .9 | 15 | 16 |
| 101 | 1-1/8" | 7/16" | 7/16" | 1/2-13" | 1" | 1" | 1" | 1" | 3" | 1.8 | 37.5 | 43 |
| 102 | 1-3/8" | 9/16" | 9/16" | 5/8-11" | 1-1/4" | 1-1/4" | 1-1/4" | 1-1/4" | 3-3/4" | 2.9 | 82.5 | 94 |
| 103 | 1-1/2" | 3/4" | 3/4" | 3/4-10" | 1-3/4" | 1-1/4" | 1-1/8" | 1-1/2" | 3-7/8" | 5.3 | 145 | 160 |
| 104 | 1-5/8" | 7/8" | 7/8" | 7/8-9" | 2" | 1-1/4" | 1" | 1-11/16" | 3-15/16" | 7.2 | 202.5 | 210 |
| 105 | 1-3/4" | 1" | 1" | 1-8" | 2-1/4" | 1-5/8" | 1-1/4" | 1-7/8" | 4-3/4" | 9.4 | 327.5 | 340 |
| 105A | 1-3/4" | 1" | 1" | 1-1/8-7" | 2-1/4" | 1-5/8" | 1-1/4" | 1-7/8" | 4-3/4" | 11.3 | 297 | 340 |
| 106 | 2" | 1-1/4" | 1-1/4" | 1-1/4-7" | 2-7/8" | 1-7/8" | 1-3/8" | 2-1/4" | 5-1/2" | 14.7 | 550 | 623 |
| 107 | 2-1/2" | 1-3/8" | 1-3/8" | 1-1/2-6" | 3-1/8" | 2-1/8" | 1-3/4" | 2-5/8" | 6-1/2" | 17.8 | 807.5 | 919 |

CLEVIS PINS - HEAT TREATED

SELF-COLORED OR HOT GALVANIZED



| Self-Colored Part No. | Hot Galvanized Part No. | Shank Diameter | Dimensions in Inches | | | | | | | Weight Per 100 In Lbs. |
|-----------------------|-------------------------|----------------|----------------------|------------|---------|-----------|--------|----------|------|------------------------|
| | | | Lengths | | Head | | Hole | | | |
| | | | Overall | Under Head | O.D. | Thickness | I.D. | *Center | | |
| 19005 3 | 19105 0 | 1/4" | 1-1/4" | 1-1/8" | 7/16" | 1/8" | 7/64" | 1-1/32" | 1.9 | |
| 19010 7 | 19110 4 | 5/16" | 1-1/2" | 1-3/8" | 1/2" | 1/8" | 7/64" | 1-1/4" | 3.4 | |
| 19015 2 | 19115 9 | 3/8" | 1-11/16" | 1-1/2" | 9/16" | 3/16" | 1/8" | 1-11/32" | 5.7 | |
| 19020 6 | 19120 3 | 7/16" | 1-11/16" | 1-1/2" | 3/4" | 3/16" | 1/8" | 1-23/64" | 8.4 | |
| 19025 1 | 19125 8 | 7/16" | 1-15/16" | 1-3/4" | 3/4" | 3/16" | 1/8" | 1-5/8" | 9.5 | |
| 19030 5 | 19130 2 | 1/2" | 2-5/32" | 1-15/16" | 13/16" | 7/32" | 1/8" | 1-13/16" | 13.3 | |
| 19035 0 | 19135 7 | 5/8" | 2-17/32" | 2-5/16" | 1-1/32" | 7/32" | 5/32" | 2-5/32" | 24 | |
| 19040 4 | 19140 1 | 3/4" | 3" | 2-3/4" | 1-3/16" | 1/4" | 3/16" | 2-9/16" | 40 | |
| 19045 9 | 19145 6 | 7/8" | 3-1/2" | 3-1/4" | 1-1/4" | 1/4" | 13/64" | 3" | 62 | |
| 19050 3 | 19150 0 | 1" | 4-5/32" | 3-25/32" | 1-7/16" | 3/8" | 13/64" | 3-17/32" | 96 | |
| 19055 8 | 19155 5 | 1-1/8" | 4-5/8" | 4-1/4" | 1-5/8" | 3/8" | 13/64" | 3-15/16" | 134 | |

*From under head